



The SVF Series C8 Ball Valve meets the Chlorine Institute Specifications (Pamphlet 6) for piping systems for Dry Chlorine Service. This series is available with FNPT and socket weld end connections.

SERIES C8 DESIGN FEATURES

- ✓ Ideal for use in Dry or Liquid Chlorine Service
- ✓ Meets the Chlorine Institute Specifications (Pamphlet 6) for piping systems for Dry Chlorine Service
- ✓ Encapsulated body seals to facilitate welding without disassembly
- ✓ Live-loaded stem packing ensures seal-tight pressure containment even under thermal cycling
- ✓ Three-piece "swing out" design offers easy access for in-line maintenance
- ✓ ISO 5211 mounting pad for easy actuation
- ✓ Standard seat material is TFM1600™
- ✓ Blowout proof stem adds safety & reliability
- ✓ Full range of options to suit specific requirements

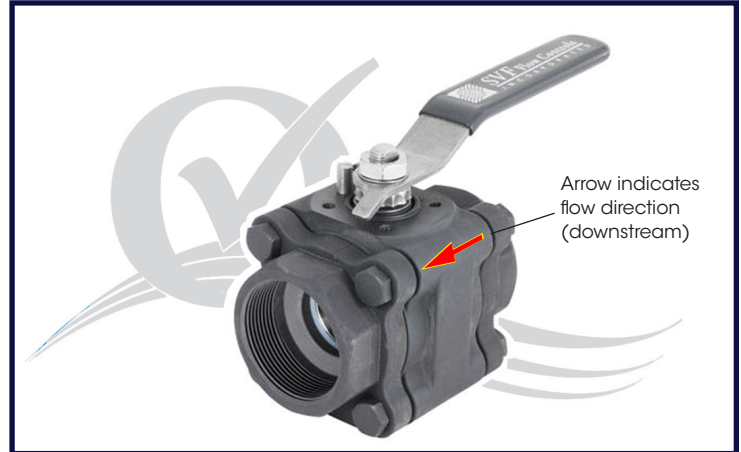

The Series C8 Ball Valve is available with additional options. Contact SVF for more information.

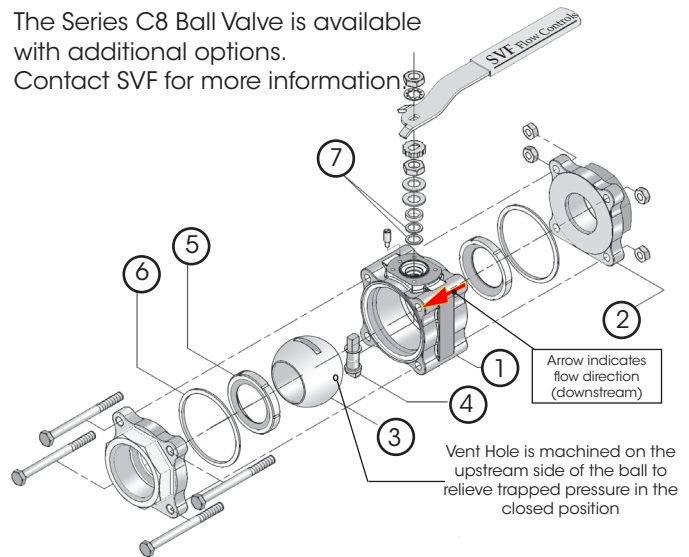

MATERIALS OF CONSTRUCTION

ITEM	DESCRIPTION	MATERIALS SPECIFICATIONS
1	Body	Carbon Steel (ASTM A216 - WCB)
2	End Connector	Carbon Steel (ASTM A216 - WCB)
3	Ball	Monel (ASTM B164 N04400), Hastelloy (ASTM A494, CW 12MW)
4	Stem	Monel (ASTM B164 N04400), Hastelloy (ASTM A494, CW 12MW)
5	Seat	TFM1600™
6	Body Seal	PTFE
7	Stem Seal	SupraLon™

C8 MATERIAL RECOMMENDATIONS

Environment	Service	Max. Chlorine Conc. PPM of H2O	Recommendation for Ball & Stem Material
Clean (no Chlorine in the air)	Mid-Line	20 ppm	Monel Ball & Stem
		50 ppm	Hastelloy Ball, Monel Stem
		150 ppm	Hastelloy Ball & Stem
Chlorine Contaminated	Mid-Line	150 ppm	Hastelloy Ball & Stem
Chlorine	End of Line	150ppm	Hastelloy Ball & Stem

What do you need today?™

HIGH PURITY VALVES
CleanFLOW


PRO-SPEC
PROCESS SPECIFIC

QUALITY FLOWS THROUGH US

DIMENSIONS, WEIGHT, CV, TORQUE


Size	A		B		D		L		Weight		Cv	Torque**	
	in.	mm	in.	mm	in.	mm	in.	mm	lbs	kg		in-lbf	Nm
1/4" *	2.60	66	0.44	11	5	127	1.8	46	2	0.9	3	45	5
3/8" *	2.60	66	0.44	11	5	127	1.8	46	2	0.9	5	45	5
1/2"	2.60	66	0.44	11	5	127	1.8	46	2	0.9	8	45	5
3/4"	2.81	71	0.56	14	5	127	1.9	48	2	0.9	12	45	5
1"	3.70	94	0.81	21	6	152	2.4	61	4	1.8	32	100	11
1-1/4"	4.25	108	1.00	25	6	152	2.6	66	5	2.3	57	130	15
1-1/2"	4.57	116	1.25	32	7	178	3.2	81	7	3.2	80	280	32
2"	5.04	128	1.50	38	7	178	3.3	84	11	5.0	104	360	41

C8 - PRESSURE/TEMPERATURE CHART

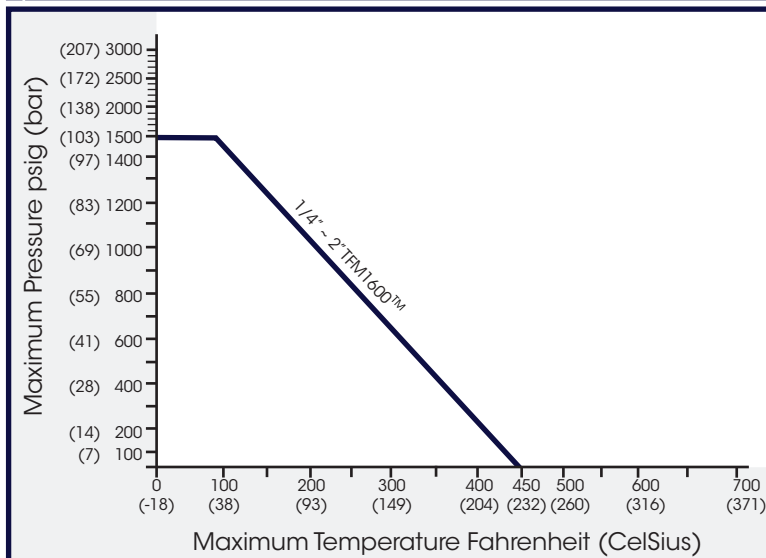

* 1/4" and 3/8" are Full Port

** At full differential pressure for clean fluids with TFM1600™ Seats

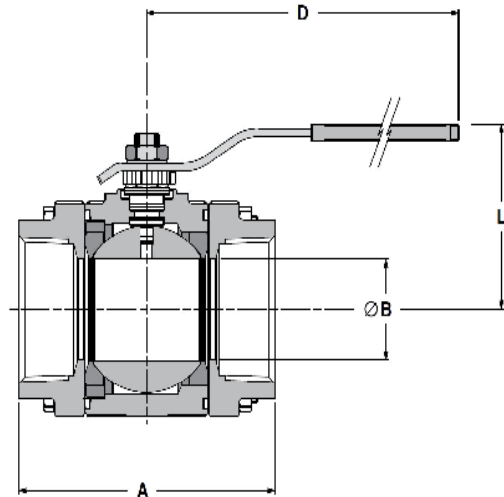

HOW TO ORDER SERIES C8 BALL VALVES

Please refer to the next page for our comprehensive
How to Order Guide for Series C8 Ball Valves.

Ordering Code Sequence (Columns 1 thru 11)

1	2	3	4	5	6
SERIES	BODY	ENDS	BALL	STEM	SEAT MATERIAL
C800 =	4 = Carbon Steel ASTM A216 - WCB	4 = Carbon Steel ASTM A216 - WCB	9 = Hastelloy ASTM A494CW12MW 3 = Monel ASTM B164 N04400	9 = Hastelloy ASTM A494CW12MW 3 = Monel ASTM B164 N04400	A = TFM1600™

7	8	9	10	11
BODY SEAL	END CONNECTIONS	VALVE SIZE	OPTIONS*	SPECIAL SERVICES*
T = PTFE	SE0 = Threaded Ends (FNPT) SW0 = Socket Weld Ends BW0 = Butt Weld Ends Schedule 40 wall (Standard) AAA = Threaded End X Socket Weld End AAB = Threaded End X Butt Weld (Sch-40) End Butt Weld Ends: BWA = Schedule 5 BWB = Schedule 10 BWC = Schedule 80	002 = 1/4" (Full Port) 003 = 3/8" (Full Port) 005 = 1/2" 007 = 3/4" 010 = 1" 012 = 1-1/4" 015 = 1-1/2" 020 = 2"	00 = None OH = Oval Handle LK = Locking Device SX = ISO Cast Stem Extension AD = Anti-Static Device AA = Oval Handle & Locking Device AB = Oval Handle & ISO Cast Stem Extension AG = ISO Cast Stem Extension & Locking Device JA = Oval Handle, ISO Cast Stem Extension & Locking Device	00 = None

Order Example: (C8004499ATSE00100000) The Part Number will contain 20 digits.

Ordering Code Sequence >>

Sample Part Number >>

1	2	3	4	5	6	7	8	9	10	11
C800	4	4	9	9	A	T	SE0	010	00	00
Valve Series	Body Material	End Material	Ball	Stem	Seat Material	Seal Material	End Connections	Valve Size	Options*	Special Services*

* Not all Options or Special Services available on all ball valves. Consult SVF for additional information.