


OSB33GE



- Ductile Iron Grooved End Butterfly Valve 2"-12"
- 300PSI Rated
- Grooved End to AWWA 606
- Design/Testing to MSS-SP-67
- Ductile Iron disc/EPDM Encapsulated
- NSF approved coating and EPDM encapsulated disc
- Epoxy coated
- ISO-5211 Direct Mount

#	NAME	A
1	DOWN SHAFT	ASTM A276 420
2	O-RING	NBR
3	BODY	ASTM A536 65-45-12
4	DISC	ASTM A536 65-45-12-EPDM
5	UP SHAFT	ASTM A276 420
6	O-RING	NBR
7	NAME PLATE	
8	RIVET	
9	WASHER	ASTM A570 Gr 33
10	BOLT	ASTM A570 Gr 33
11	ROLL PIN	65Mn

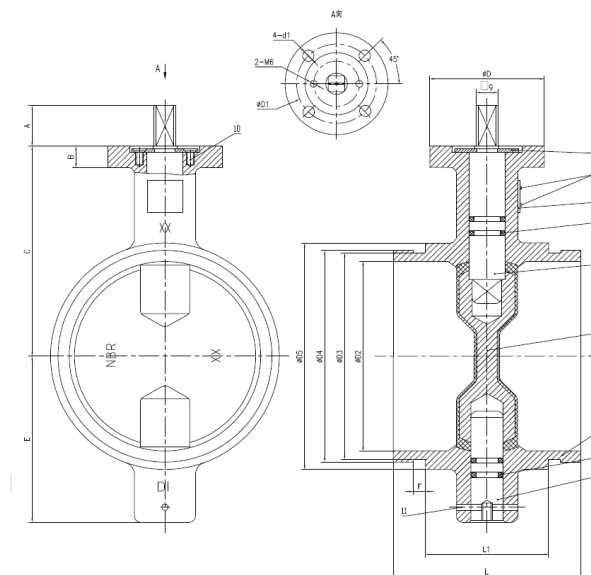

SIZE	A	B	C	E	F	D	D1	D2	D3	D4	D5	L1	L	Ød1	g
2"	1.26	0.55	4.08	2.44	0.31	3.54	2.76	2.05	2.24	2.37	2.78	1.37	3.24	0.39	9 MM
2-1/2"	1.26	0.59	4.21	2.52	0.31	3.54	2.76	2.44	2.72	2.87	3.19	1.93	3.81	0.39	9 MM
3"	1.26	0.59	4.57	2.87	0.31	3.54	2.76	3.03	3.35	3.50	3.78	1.93	3.81	0.39	9 MM
4"	1.26	0.59	5.63	3.82	0.39	3.54	2.76	3.87	4.33	4.50	4.76	2.56	4.56	0.39	11 MM
5"	1.26	0.59	5.87	4.69	0.39	3.54	2.76	5.00	5.39	5.56	6.26	3.81	5.81	0.39	14 MM
6"	1.26	0.67	6.57	5.20	0.39	3.54	2.76	5.93	6.45	6.63	7.09	3.81	5.81	0.47	14 MM
8"	1.57	0.67	7.95	6.38	0.43	4.92	4.02	7.95	8.44	8.62	9.09	2.87	5.25	0.47	17 MM
10"	1.57	0.67	10.28	7.44	0.50	4.92	4.02	9.96	10.56	10.75	11.14	3.75	6.25	0.47	22 MM
12"	1.57	0.67	10.59	9.06	0.50	4.92	4.02	11.93	12.53	12.75	13.39	4.00	6.50	0.47	24 MM

OS&B® Industrial

13-495 Woodward Ave., Hamilton, Ontario, Canada L8H 6N6
T. 1.905.661.0976 F. 1.905.667.1842

All rights reserved. OS&B® Industrial reserves the right to change product specifications and material or discontinue models without notice.

www.osbindustrial.ca

