



OSB5423

- Stainless Steel 3-piece 1000 WOG Investment casting
- Full Port
- 1/2"-1" 2000WOG, 1-1/4"-2" 1500WOG, 2-1/2"-4" 1000WOG
- Temperature -4°F - +392°F
- Blow-out proof stem
- Live loaded Packing,
- Anti-static device
- API 607 Fire Safe Design
- ISO-5211 Direct Mount

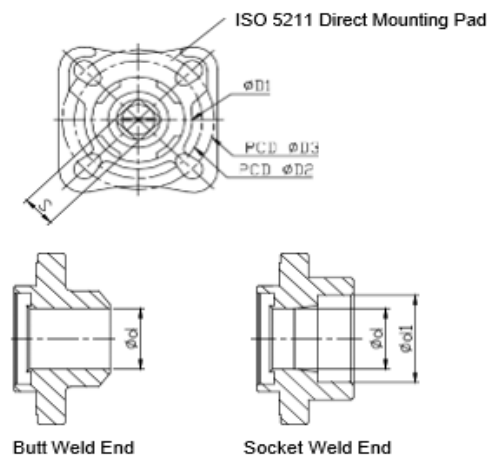

ITEM	PARTS	MATERIAL	
1	BODY	ASTM A351-CF8M	ASTM A216-WCB
2	CAP		
3	BALL	ASTM A351-CF8M	
4	STEM	ASTM A276-316	
5	SEAT	RTFE	
6	SEAL	PTFE	
7	THRUST WASHER		
8	PACKING		
9	O-RING	VITON	
10	BELLEVILLE WASHER	AISI 301	
11	HANDLE	STAINLESS STEEL	
12	STEM NUT	AISI 304	
13	LOCKING PAD		
14	GLAND RING		
15	LOCKING WASHER		
16	BOLT		
17	NUT		
18	SPRING WASHER	PVC	
19	HANDLE SLEEVE		

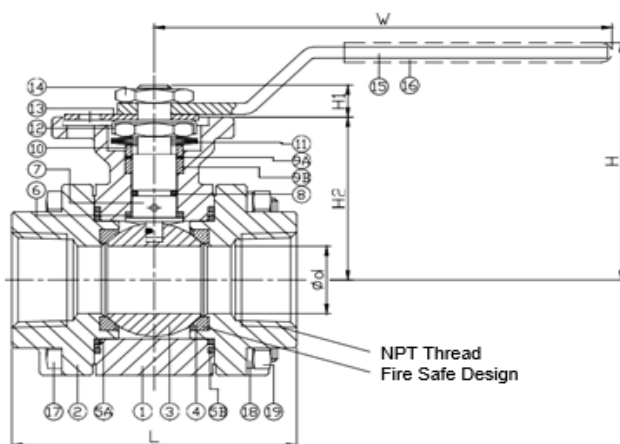

OC12345.2C

NPS	d	d1	L	H	H1	H2	W	S	D1	D2	D3	Torque (in-lb)
1/2"	0.59	0.87	2.95	2.52	0.33	1.89	4.51	0.35	1.22	1.42	1.65	31.9
3/4"	0.79	1.08	3.15	2.64	0.35	1.81	4.51	0.35	1.22	1.42	1.65	45.1
1"	0.94	1.38	3.66	3.19	0.43	2.28	5.51	0.43	1.4	1.65	1.97	68.2

NPS	d	d1	L	H	H1	H2	W	S	D1	D2	D3	Torque (in-lb)
1-1/4"	1.18	1.69	4.33	3.37	0.43	2.47	7.48	0.43	1.4	1.65	1.97	115.9
1-1/2"	1.5	1.93	4.72	4.15	0.55	2.93	9.25	0.55	2.2	1.97	2.76	139
2"	1.97	2.41	5.51	4.43	0.55	3.23	9.25	0.55	2.2	1.97	2.76	216

NPS	d	d1	L	H	H1	H2	W	S	D1	D2	D3	Torque (in-lb)
2-1/2"	2.56	2.91	7.25	5.78	0.67	3.8	13.39	0.67	2.99	2.76	4.02	393.9
3"	2.95	3.54	8.03	6.26	0.67	4.28	13.39	0.67	2.99	2.76	4.02	772.7
4"	3.78	4.55	9.45	-	-	-	13.39	0.87	3.94	4.02	4.92	798.3

OS&B® Industrial

13-495 Woodward Ave., Hamilton, Ontario, Canada L8H 6N6

T. 1.905.661.0976 F. 1.905.667.1842

All rights reserved. OS&B® Industrial reserves the right to change product specifications and material or discontinue models without notice.

www.osbindustrial.ca

