



OSB7915

-L and T Port, ½"-6" 150# Stainless Steel Ball Valve
 -Class 150
 -Temperature -4°F - +392°F
 -Investment casting, blow-out proof stem
 -PTFE SEATS
 - ISO 5211 Mounting Pad

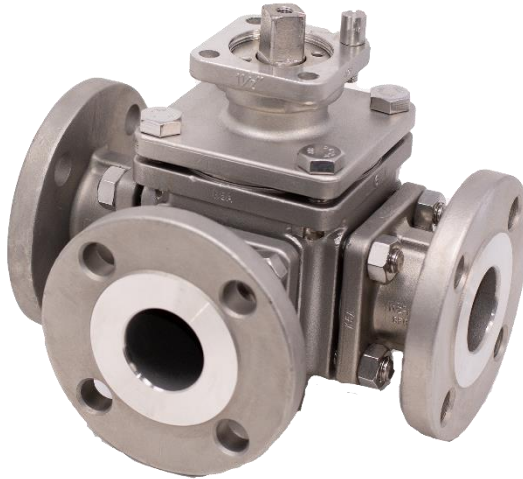

ITEM	PARTS	MATERIAL	
1	BODY	ASTM A351-CF8M	ASTM A351-CF8
2	CAP		
3	BALL & STEM		
4	SEAT	PTFE	
5	SEAL	VITON	
6	O-RING	VITON	
7	GASKET	PTFE	
8	PACKING	PTFE	
9	GLAND RING	AISI 304	
10	SPRING WASHER	AISI 304	
11	CAP-C	ASTM A351-CF8M	ASTM A351-CF8
12	HANDLE HEAD	ASTM A351-CF8	
13	HANDLE SLEEVE	PVC	
14	HANDLE	AISI 304	
15	HANDLE BOLT	PTFE	
16	SLEEVE	AISI 304	
17	CAP-B BOLT	AISI 304	
18	CAP-B	ASTM A351-CF8M	ASTM A351-CF8
19	BOLT	AISI 304	
20	STOP PIN	AISI 304	
21	CAP-A BOLT	AISI 304	
22	CAP-A	ASTM A351-CF8M	ASTM A351-CF8
23	LOCKING WASHER	AISI 304	
24	HANDLE WASHER	AISI 304	
25	STEM NUT	AISI 304	

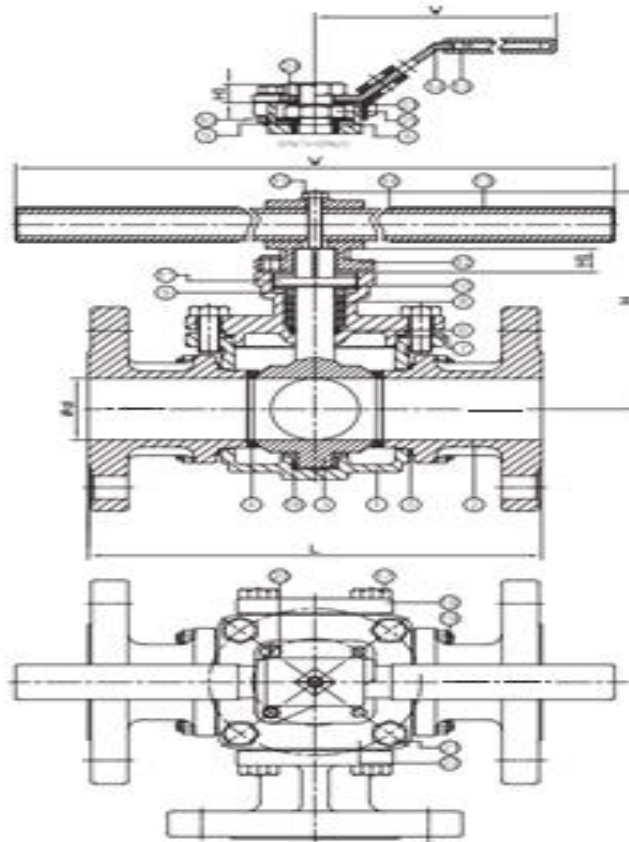

OS&B® Industrial

13-495 Woodward Ave., Hamilton, Ontario, Canada L8H 6N6
 T. 1.905.661.0976 F. 1.905.667.1842

All rights reserved. OS&B® Industrial reserves the right to change product specifications and material or discontinue models without notice.

www.osbindustrial.ca

NPS	d	CLASS 150	CLASS 300	PN 16/40	JIS 10K	H	H1	W	Torque (in-lb)
		L	L	L	L				
1/2"	0.59	5.83	6.3	6.3	6.3	3.15	0.35	4.84	202.7
3/4"	0.79	6.02	6.50	6.5	6.5	3.31	0.35	4.84	241.6
1"	0.98	6.61	7.09	7.09	7.09	3.78	0.43	6.02	276.1
1-1/4"	1.26	8.7	8.70	9.21	8.7	6.73	0.75	15.87	345.2
1-1/2"	1.57	8.7	8.70	9.21	8.7	6.73	0.75	15.87	345.2
2"	1.97	10	10	10.75	10	6.93	0.75	15.87	736.4
2-1/2"	2.56	11.81	11.81	11.81	11.81	7.8	0.94	19.84	805.4
3"	2.99	12.01	12.01	12.01	12.01	8.5	0.94	19.84	1656.9
4"	3.78	14.53	14.53	14.53	14.53	9.29	0.94	19.84	2071.1
6"	5.83	18.9	19.49	18.9	18.9	12.95	1.5	31.5	3912

OS&B® Industrial

13-495 Woodward Ave., Hamilton, Ontario, Canada L8H 6N6

T. 1.905.661.0976 F. 1.905.667.1842

All rights reserved. OS&B® Industrial reserves the right to change product specifications and material or discontinue models without notice.

www.osbindustrial.ca