


## OSB87LS

The OSB87LS is available with a Standard Mechanical Switch (2 SPDT), an optional Magnetic Reed Switch, or a variety of optional Proximity Switches. Refer to the How to Order Guide for a list of available switches and power specifications & ratings. CSA approved.

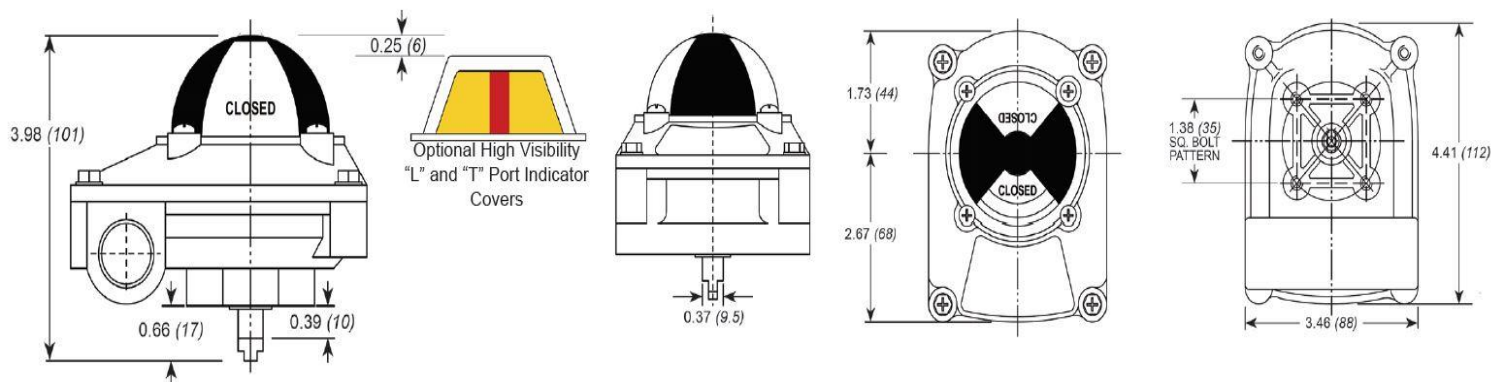

<b>Enclosure</b>	Aluminum Weatherproof NEMA 4/4X (IP67)
<b>Temperature</b>	-4 <sup>0</sup> F to 176 <sup>0</sup> F (-20 <sup>0</sup> C to 80 <sup>0</sup> C)
<b>Conduit Entry</b>	2 X 1/2" NPT
<b>Terminal Strip</b>	8 points
<b>Position Indicator</b>	2-color OPEN-Yellow/CLOSED-Red (Other options available)
<b>External Coating</b>	Polyester Powder Coating
<b>Shaft &amp; Cover Bolts</b>	300 Series Stainless Steel

### OS&B<sup>®</sup> Industrial

13-495 Woodward Ave., Hamilton, Ontario, Canada L8H 6N6  
 T. 1.905.661.0976 F. 1.905.667.1842

All rights reserved. OS&B<sup>®</sup> Industrial reserves the right to change product specifications and material or discontinue models without notice.

[www.osbindustrial.ca](http://www.osbindustrial.ca)